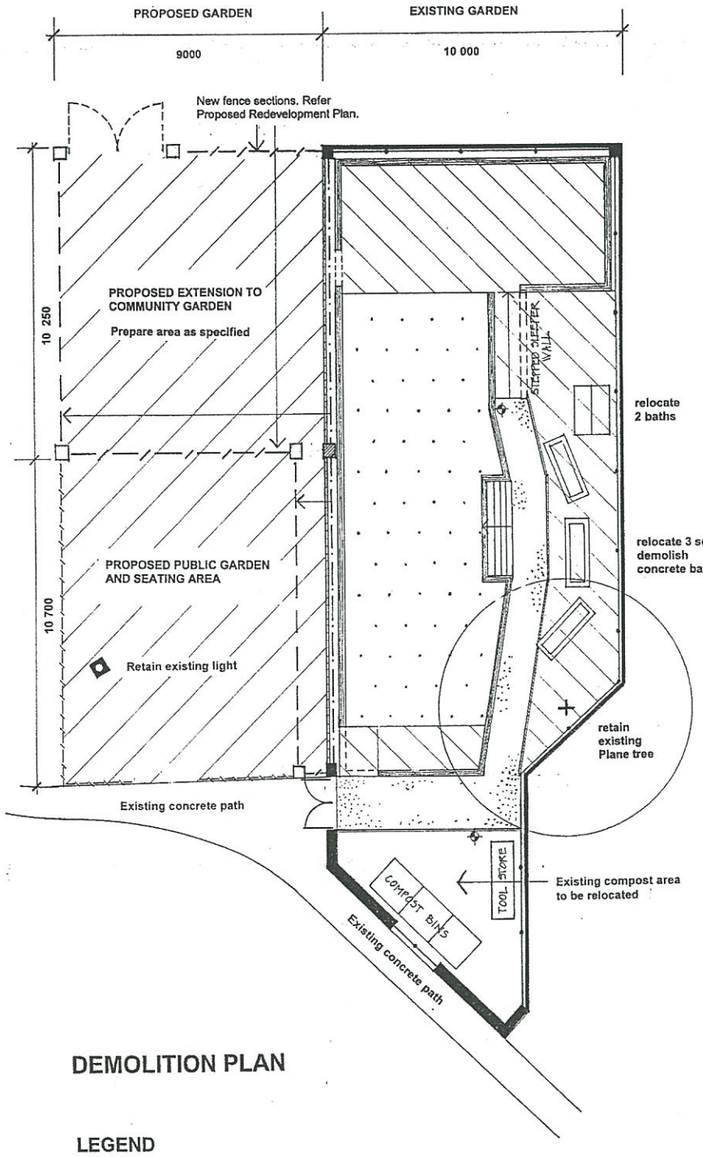

DEMOLITION PLAN

LEGEND

extent of proposed garden extension

EXISTING ITEMS TO BE RETAINED

- masonry wall
- masonry column
- h 1800 palisade fence and brick edging
- h 1800 palisade gate
- railway sleeper walls
- crushed stone path
- taps
- garden bed
- trees

EXISTING ITEMS TO BE RELOCATED

- h 1800 palisade fence
- above fence in new location

EXISTING ITEMS TO BE REMOVED

- masonry column
- railway sleeper wall
- brick edging
- timber edging
- garden bed to be redeveloped

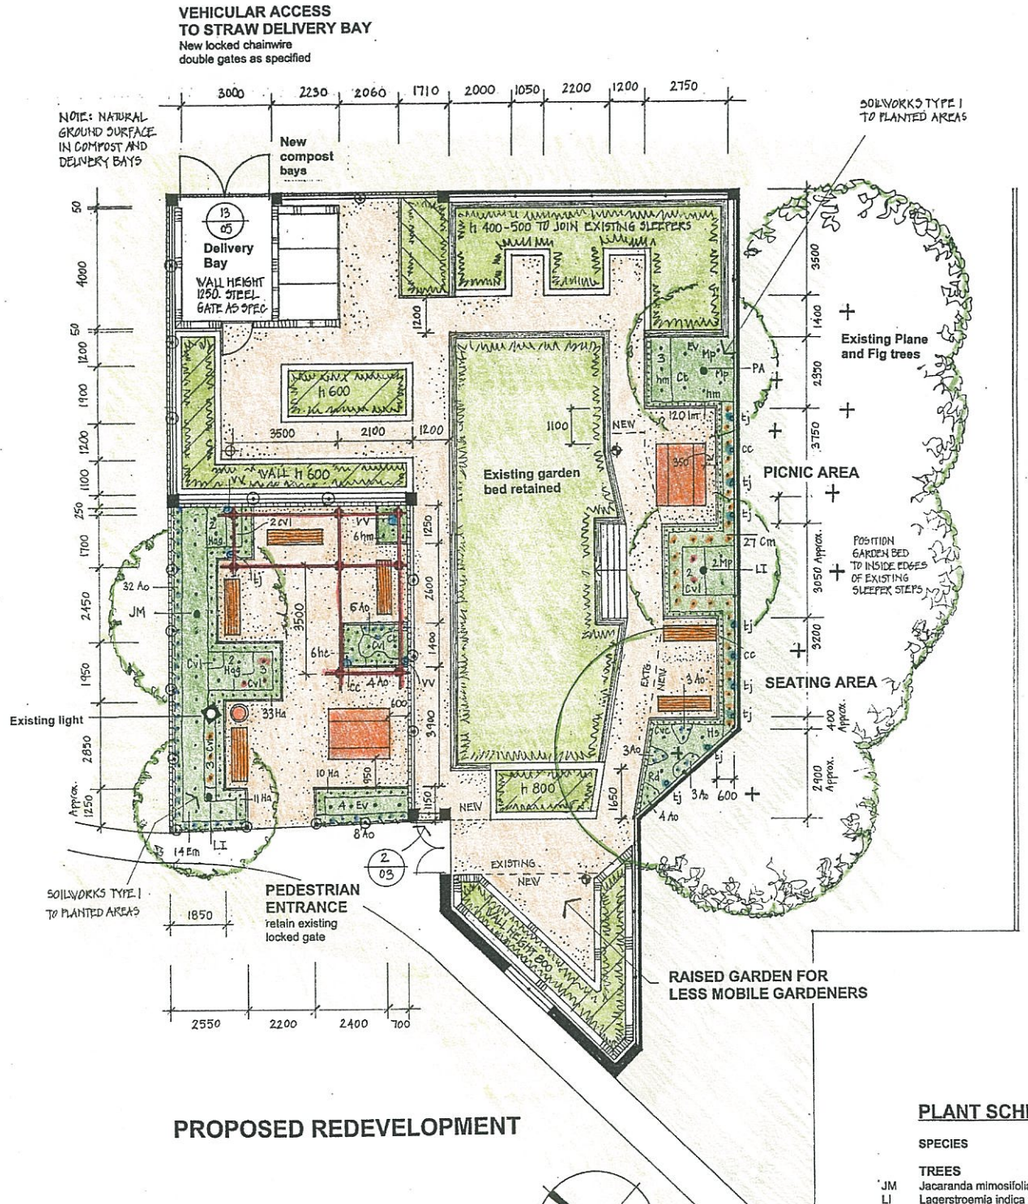

PROPOSED REDEVELOPMENT

RAGLAN STREET FOOTPATH

MARTON BUILDING

LEGEND

Detail	Symbol	
1-5 / 03		h 1800 locked palisade fence with masonry columns to secure community garden
3 / 03		h 900 unlocked palisade fence to enclose public garden and seating area
		new fence post locations
		existing railway sleeper wall
16 / 06		new railway sleeper wall
13,15 / 05		new brick walls
		existing brick edging
17 / 06		new brick edging
18 / 06		new timber edging
6-8 / 04		clay pipe and timber pergola
		timber picnic table and benches (refer spec) (wheelchair accessible)
		timber seat (refer spec)
		existing tap
		new tap (connect to existing supply)
18 / 06		compacted decomposed granite pavement
		existing plants to be retained (refer spec)
		herbs, fruit and vegetables (gardeners' choice)
19 / 06	AS NOTED	soilworks type 1 - ornamental garden beds
20 / 06		soilworks type 2 - new raised vegetable garden beds
21 / 06		soilworks type 3 - new vegetable garden beds in ground

PLANT SCHEDULE

	SPECIES	No.	SIZE	SPACING
	TREES			
JM	Jacaranda mimosifolia	1	35 litre	as shown
LI	Lagerstroemia indica 'rubra'	2	35 litre	as shown
PA	Plumeria acutifolia	1	35 litre	as shown
	SHRUBS			
Ao	Agapanthus orientalis	63	150mm	400 centres
Cvc	Callistemon viminalis 'Captain Cook'	1	5 litre	as shown
Cvl	Callistemon viminalis 'Little John'	12	300mm	as shown
Cl	Choisya ternata	2	5 litre	as shown
Cm	Clivia miniata	27	150mm	500 centres
Em	Eriostemon myoporoides 'Profusion'	14	5 litre	800 centres
Ev	Eriostemon verrucosus 'Stardust'	5	5 litre	750 centres
Ha	Hebe albicans	54	300mm	350 – 400cs
Hag	Hebe 'Autumn Glory'	4	5 litre	as shown
Hs	Hebe salicifolia	1	5 litre	as shown
Mp	Murraya paniculata	4	5 litre	as shown
Rd	Raphiolepis x delacourri	1	5 litre	as shown
	GROUND COVERS			
hc	Hypericum calycinum	6	300mm	400 centres
hm	Hypericum moserianum 'Tricolor'	10	300mm	450 centres
lm	Liriope muscari 'variegata'	120	150mm	200 centres
	CLIMBERS			
cc	Clytostoma callistegioides	3	300mm	as shown
tj	Trachelospermum jasminoides	9	300mm	as shown
vv	Vitis vinifera	3	300mm	as shown

REVISIONS		
REV	ISSUE / AMENDMENTS	DATE

DRAWN	DATE	CHECKED

KNOX & PARTNERS LANDSCAPE ARCHITECTS
2/623 HARRIS STREET
ULTIMO NSW 2007
TEL 02 9281 7999
FAX 02 9212 7031
EMAIL: knoxptr@ozemail.com.au

PROJECT

Department of Housing - Waterloo

SOLANDER & MARTON COMMUNITY GARDENS
Extension and Redevelopment

DRAWING

MARTON GARDEN

SCALE	DATE
1:100	02.04.01
JOB NO. 0104	PROJ. L ARCH HL

CAD FILE NO.	DWG NO.	REV.
	WD 01	A

© COPYRIGHT KNOX & PARTNERS ABN 28 003 472 339